

Data sheet

FxiS / FxeS



Technical data

Type	-	F3iS	F3eS
Accuracy class	%	$\leq \pm 0.10$	
Rated torque (M_{dN})	Nm	30,000 40,000 50,000	30,000 40,000 50,000

Torque measuring system

Technology	-	Rotating	
Rated torque (M_{dN}) #1	Nm	30,000 40,000 50,000	30,000 40,000 50,000
Rated torque short measurement range (optional, minimum) (M_{dNS}) #2	Nm	6,000 8,000 10,000	6,000 8,000 10,000
Accuracy class (extended for M_{dN})	%	N/A	
Outputs	-	Frequency, Voltage, Current, CAN bus, Alert	
Test signal	-	see test report	

Mechanical dimensions #3

Outer diameter of rotor #4	mm	348.00 / 330.00
Lengths (Rotor, without centering)	mm	160
Pitch circle diameter #5	mm	290.0

Speeds and speed measuring systems

Speed detection (integrated)	-	inductive
Speed detection (optional)	-	optical
Maximum Speed without speed detection system	rpm	10,000
Optional increased speed	rpm	N/A
Maximum speed with magnetic speed encoder	rpm	N/A
Maximum speed with optical speed encoder	rpm	5,500
Maximum speed with inductive speed encoder	rpm	10,000

Torque accuracy class per output type (related to M_{dN})

Frequency output	%	$\leq \pm 0.10$
CAN output	%	$\leq \pm 0.10$
Voltage output	%	$\leq \pm 0.10$
Current output	%	$\leq \pm 0.10$
Frequency output (option higher accuracy)	%	N/A
CAN (option higher accuracy)	%	N/A

Technical data

Type	-	F3iS	F3eS
Accuracy class	%	$\leq \pm 0.10$	
Rated torque (M_{d_n})	Nm	30,000 40,000 50,000	30,000 40,000 50,000

Linearity deviation including hysteresis related to M_{d_n} #6

Frequency, 0%...30%	%	$\leq \pm 0.030$
Frequency, 30%...60%	%	$\leq \pm 0.050$
Frequency, 60%...100%	%	$\leq \pm 0.100$
CAN, 0%...30%	%	$\leq \pm 0.030$
CAN, 30%...60%	%	$\leq \pm 0.050$
CAN, 60%...100%	%	$\leq \pm 0.100$
Voltage output	%	$\leq \pm 0.10$
Current output	%	$\leq \pm 0.10$

Rel. standard deviation of the reproducibility according to DIN 1319, by reference to variation of the output signal (rel. to M_{d_n})

Frequency output	%	$\leq \pm 0.05$
CAN output	%	$\leq \pm 0.05$
Voltage output	%	$\leq \pm 0.05$
Current output	%	$\leq \pm 0.05$

Temperature influence per 10K in the nominal temperature range on the output signal related to the actual value of signal span (rel. to M_{d_n})

Frequency output	%	$\leq \pm 0.10$
CAN output	%	$\leq \pm 0.10$
Voltage output	%	$\leq \pm 0.10$
Current output	%	$\leq \pm 0.10$

Temperature influence per 10K in the nominal temperature range on the zero signal (rel. to M_{d_n})

Frequency output	%	$\leq \pm 0.10$
CAN output	%	$\leq \pm 0.10$
Voltage output	%	$\leq \pm 0.10$
Current output	%	$\leq \pm 0.10$

Long-term drift over 48h at reference temperature

Voltage output	mV	<1.0
Current output	μA	<0.80

Technical data

Type	-	F3iS	F3eS
Accuracy class	%	$\leq \pm 0.10$	
Rated torque (M_{dN})	Nm	30,000 40,000 50,000	30,000 40,000 50,000

Nominal sensitivity (range between zero torque and rated torque)

Frequency output	kHz	20
Voltage output	V	5.0 / 10.0 / 2.5 / 5.0
Current output	mA	8 / 10

Output signal at zero torque

Frequency output	kHz	60
Voltage output	V	0.0 / 0.0 / 2.5 / 5.0
Current output	mA	12 / 10

Nominal output signal

Frequency output at positive nominal value	kHz	80
Frequency output at negative nominal value	kHz	40
Voltage output at positive nominal value	V	5 / 10 / 5 / 10
Voltage output at negative nominal value	V	-5 / -10 / 0 / 0
Current output at positive nominal value	mA	20 / 20
Current output at negative nominal value	mA	4 / 0

Max. modulation range

Frequency output	kHz	30...90
Voltage output	V	-10.5...10.5
Current output	mA	0...24

Group delay time (main TCU)

Frequency output	μ s	10
Voltage output	μ s	3,000
CAN	μ s	1,000

Technical data

Type	-	F3iS	F3eS
Accuracy class	%	$\leq \pm 0.10$	
Rated torque (M_{dN})	Nm	30,000 40,000 50,000	30,000 40,000 50,000

Speed measuring system		Inductive (track at rotor)	
Pulse per rev (PPR)	ppr.	120	
Maximum speeds (related to PPR)	rpm	10,000	
Max. output frequency (RS422)	kHz	20	
Minimum speed for sufficient pulse stability	rpm	>2.5	
Speed measuring system		Magneto resistive (2 tracks approx. 90 degree phase shifted)	
Pulses per rev (PPR)	ppr.	N/A	
Maximum speeds (related to PPR)	rpm	N/A	
Max. output frequency (RS422)	kHz	N/A	
Minimum speed for sufficient pulse stability	rpm	N/A	
Nominal clearance (sensor - pole ring)	mm	N/A	
Working airgap (sensor - pole ring)	mm	N/A	
Nominal axial displacement (rotor - stator) #7	mm	N/A	
Tolerance to nominal axial displacement (rotor - stator)	mm	N/A	
Speed measuring system		Optical	
Pulses per rev (PPR)	ppr.	1,000	
Maximum speeds (related to PPR)	rpm	5,500	
Max. output frequency (RS422)	kHz	92	
Minimum speed for sufficient pulse stability	rpm	>0.3	
Nominal radial displacement (rotor - stator)	mm	3.5	
Tolerated radial displacement (rotor - stator) #7	mm	3.4...3.6	
Nominal axial displacement (rotor - stator) #7	mm	0.0	
Tolerance to nominal axial displacement (rotor - stator)	mm	+0.1/-0.1	

Technical data

Type	-	F3iS	F3eS
Accuracy class	%	$\leq \pm 0.10$	
Rated torque (M_{dN})	Nm	30,000	30,000
		40,000	40,000
		50,000	50,000

Angular measuring system			
Pulses per rev	ppr	N/A	
Resolution	°	N/A	
Output signals	-	N/A	
Measurement ranges	°	N/A	

Technical data

Type	-	F3iS	F3eS
Accuracy class	%	± 0.10	
Rated torque (M_{dN})	Nm	30,000 40,000 50,000	30,000 40,000 50,000

Temperature ranges			
Nominal temperature range (<i>Rotor</i>)	°C	0...80	
Operating temperature range (<i>Rotor</i>) #8	°C	-20...85	
Storage temperature range (<i>Rotor</i>)	°C	-30...85	
Nominal temperature range (<i>Stator</i>)	°C	0...70	0...80
Operating temperature range (<i>Stator</i>) #9	°C	-20...70	-20...85
Storage temperature range (<i>Stator</i>)	°C	-30...85	
Nominal temperature range (<i>TCU</i>)	°C	N/A	0...70
Operating temperature range (<i>TCU</i>)	°C	N/A	-20...70
Storage temperature range (<i>TCU</i>)	°C	N/A	-30...85

Mechanical shock (EN 60068-2-27)			
Quantity	-	1,000	
Duration	ms	3	
Acceleration	m/s ²	650	

Vibration load (EN 60068-2-6)			
Frequency	Hz	10...2,000	
Duration	min.	150	
Acceleration	m/s ²	200	

Load limits #10			
Limit torque, related to M_{dN}	%	250 225 200	250 225 200
Breaking torque approx., related to M_{dN}	%	500 450 400	500 450 400
Axial limit force	kN	94.00 104.50 114.00	94.00 104.50 114.00
Lateral limit force	N	24,100.00 29,600.00 34,600.00	24,100.00 29,600.00 34,600.00
Bending limit torque	Nm	3,200.00 3,600.00 4,000.00	3,200.00 3,600.00 4,000.00

Technical data

Type	-	F3iS	F3eS
Accuracy class	%	$\leq \pm 0.10$	
Rated torque (M_{d_n})	Nm	30,000 40,000 50,000	30,000 40,000 50,000

Mechanical values			
Torsional stiffness	kNm/rad	26,050 31,350 36,450	26,050 31,350 36,450
Angle of twist at M_{d_n}	°	0.066 0.073 0.079	0.066 0.073 0.079
Axial stiffness	kN/mm	2,353 2,614 2,852	2,353 2,614 2,852
Radial stiffness	kN/mm	1,271 1,562 1,875	1,271 1,562 1,875
Bending stiffness	kNm/°	202.50 229.50 254.50	202.50 229.50 254.50
Deflection at axial limit force	mm	<0.05	
Additional radial deviation at lateral limit force	mm	<0.02	
Parallel deviation at bending limit torque	mm	<0.10	
Inherent frequency	Hz	1,200 1,300 1,400	1,200 1,300 1,400
Balance quality-level (DIN ISO 1949)	-	G2.5	
Inertia of rotor	kgm ²	0.5695 0.5815 0.5948	0.5695 0.5815 0.5948
Max. limits for relative shaft vibration (peak to peak) #11	µm	$S_{(p-p)} = \frac{9000}{\sqrt{n}}$	

Technical data

Type	-	F3iS	F3eS
Accuracy class	%	$\leq \pm 0.10$	
Rated torque (M_{dN})	Nm	30,000 40,000 50,000	30,000 40,000 50,000

Weight approx.

Rotor <u>#12</u>	kg	36.5 38.2 40.4	36.5 38.2 40.4
Stator (without speed encoder) <u>#12</u>	kg	6.00	3.80

Mounting distances (without optional speed detection system)

Nominal radial displacement (rotor - stator)	mm	3.5
Tolerance to nominal radial displacement (rotor - stator)	mm	$\leq \pm 0.2$
Nominal axial displacement (rotor - stator) <u>#7</u>	mm	0
Tolerance to nominal axial displacement (rotor - stator)	mm	+0.5/-0.5

Flatness and concentricity tolerances rotor

Circular run-out-axial tolerance <u>#13</u>	mm	0.03
Circular run-out-radial tolerance <u>#13</u>	mm	0.03

Power supply

Nominal supply	V (DC)	24
Supply range <u>#14</u>	V (DC)	23...25
Max. current consumption in measuring mode	A	<0.70
Max. current consumption in start-up mode	A	<2
Nominal power consumption	W	<17

Load resistance

Frequency output	-	RS422
Voltage output	kOhm	≥ 5

Dynamic

Frequency output	kHz	≤ 7
Voltage output	kHz	≤ 1
Current output	kHz	≤ 1
CAN output conversation rate	1/s	$\leq 1,000$

Technical data

Type	-	F3iS	F3eS
Accuracy class	%	$\leq \pm 0.10$	
Rated torque (M_{d_n})	Nm	30,000 40,000 50,000	30,000 40,000 50,000
Miscellaneous			
Protection class (rotor)	-	IP54	
Protection class (stator)	-	IP54	
Protection class (rotor, extended)	-	On request	
Protection class (stator, extended)	-	On request	
Pitch circle screw information	-	24 * M20 (12.9)	
CAN	-	2B	
Configuration interface	-	RS232	
Central hole	mm	N/A	
Material	-	Steel	
Measuring range (related to M_{d_n})	%	120	
Compatible evaluation units (TCU)	-	Integrated	TCU2
Stator type	-	iS	eS
Sales information			
Article number	-	10000051	10001233
U.S. FCC certificate		Not required	

Remarks and information

Link no.	Topic	Remark
#1	Nominal torque	Based on customer requests, the measurement systems can optionally be optimized for not listed nominal torque values (intermediate ranges possible).
#2	Second torque range	<p>The written second nominal torque value ($M_{d_{ns}}$) is the smallest possible. Greater second torque ranges can be chosen on demand.</p> <p>Mechanical values and load limits vary between single and dual range torque meters. A data sheet for dual range torque meters with specific values can be requested.</p>
#3	Dimensions	Mechanical dimensions are without engagement. Use the drawings and step files as master for your constructions.
#4	Detail in the drawings	Value can vary by optional components. Please find details to this attribute in the integrated drawings.
#5	Pitch circle diameter	The pitch circle diameter is identically at input and output side for most systems. More information is given in the drawings of a product.
#6	Linearity	Values of Linearity deviation incl. Hysteresis can only be reached if positive and negative sensitivity values are used.
#7	Reference planes	Please check the drawings for information about the reference planes of this attribute.
#8	Temperature range (rotor)	No condensation allowed.
#9	Temperature range (stator)	No condensation allowed. Temperature related to housing ground point.
#10	Load limits	The given values are only valid if no other load occurs at the same time. If the loads in sum are 100%, the max. error will be 0.3% of the nominal torque.

Remarks and information

Link no.	Topic	Remark
#11	Vibration limits	Vibration limits are not an influence to the machine. They reflect the allowed effect onto the rotor (ISO 7919-3). Parameter "n" is given in "r/min."
#12	Weights	Weights are related to components without options like speed detection system. Please contact us for exact weight information of options.
#13	Flatness and concentricity tolerances	The parameters of "Flatness and concentricity tolerances rotor" are manufacturing tolerances.
#14	Supply voltage	The supply voltage range must be given at measurement system side. Long wires can reduce the voltage level from power supply to measurement system.


Drawing

iS




Rotor & stator with integrated evaluation unit (TCU)
Rotor & Stator mit integrierter Auswerteeinheit (TCU)

eS

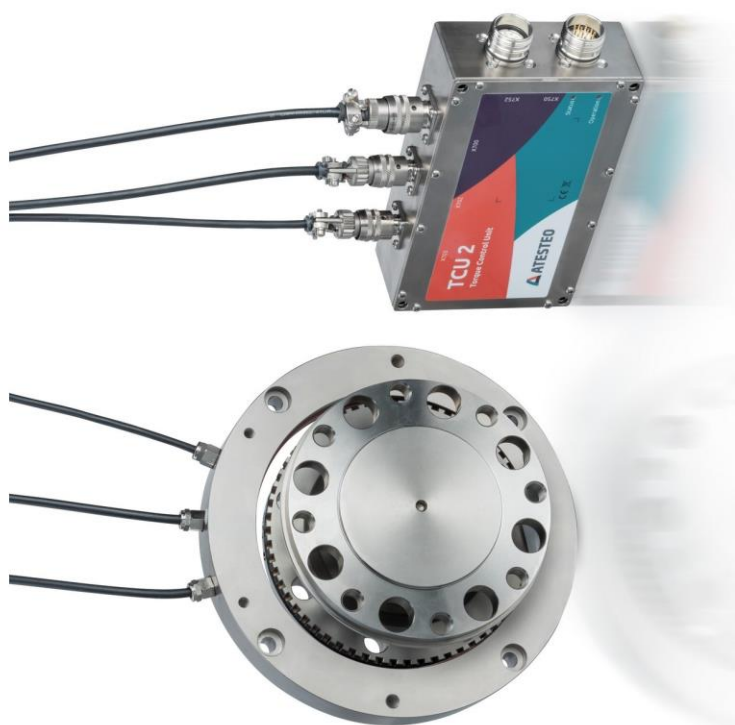

Rotor, ring stator & external evaluation unit (TCU)
Rotor, Ringstator & abgesetzte Auswerteeinheit (TCU)


Drawing

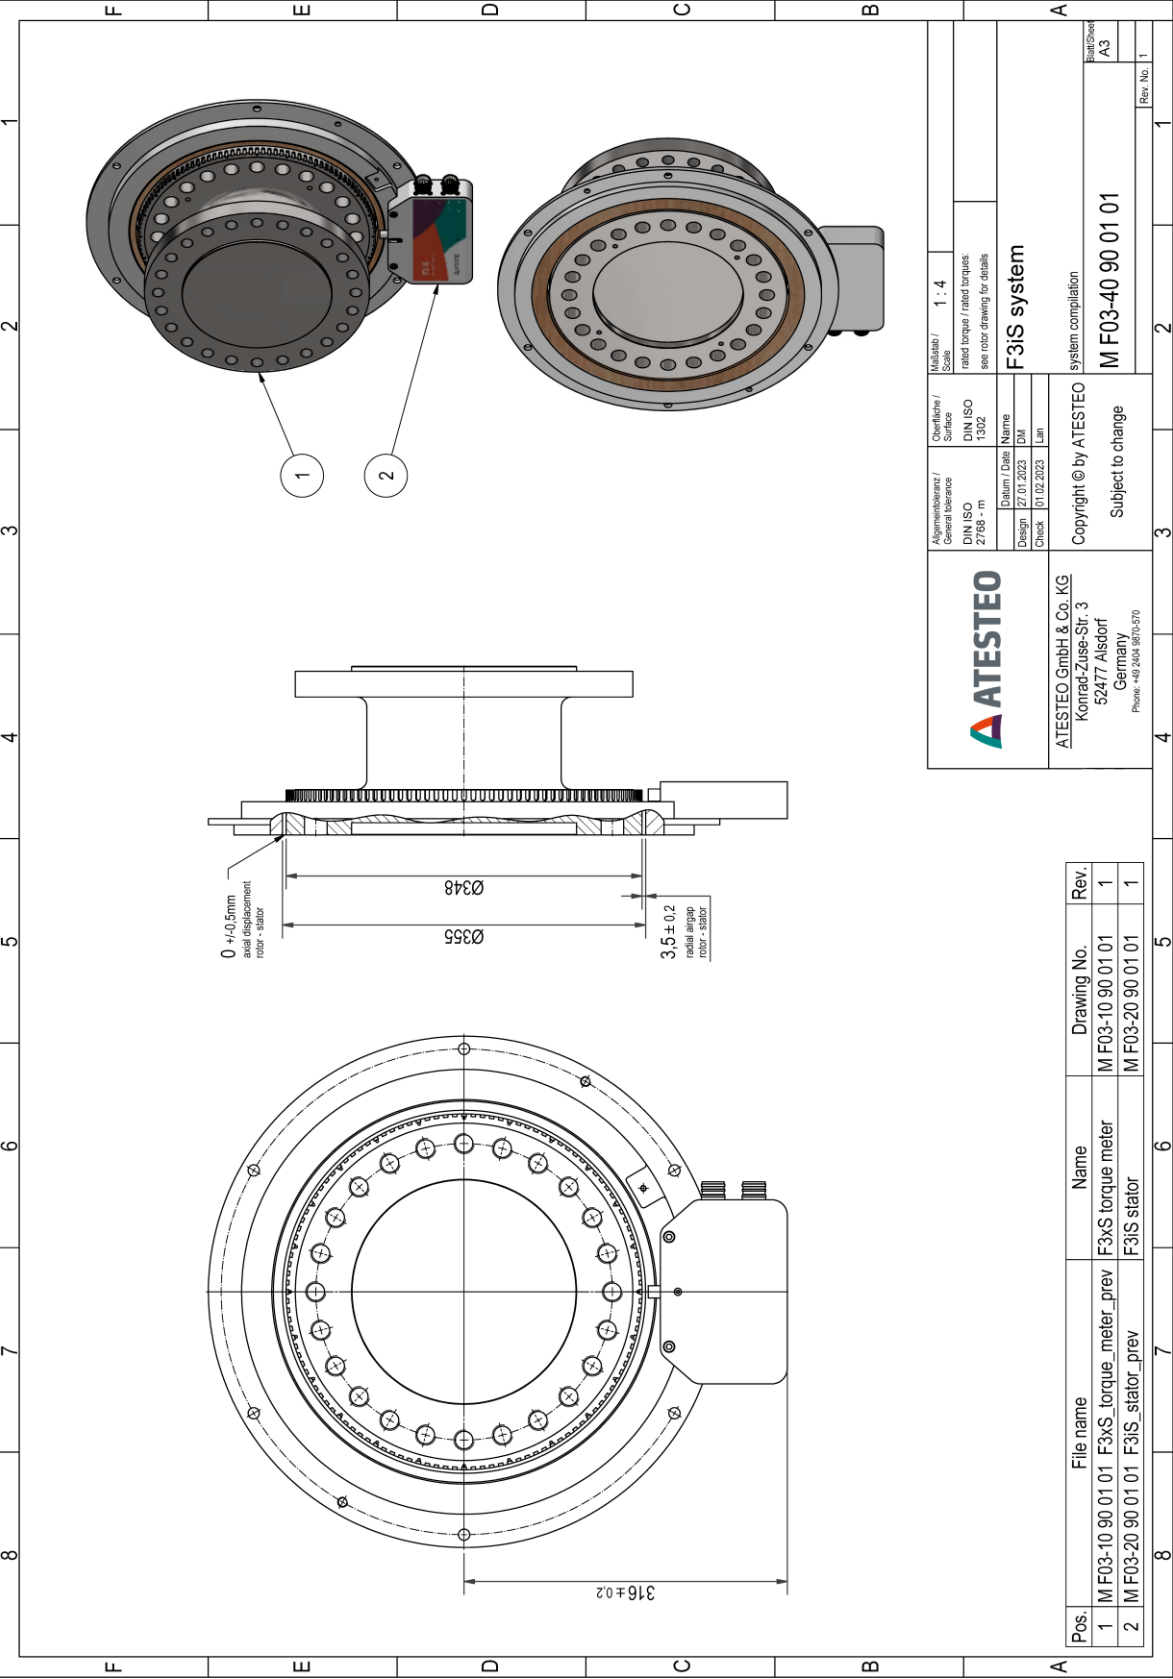

F3iS Rotor

F3xS


Drawing

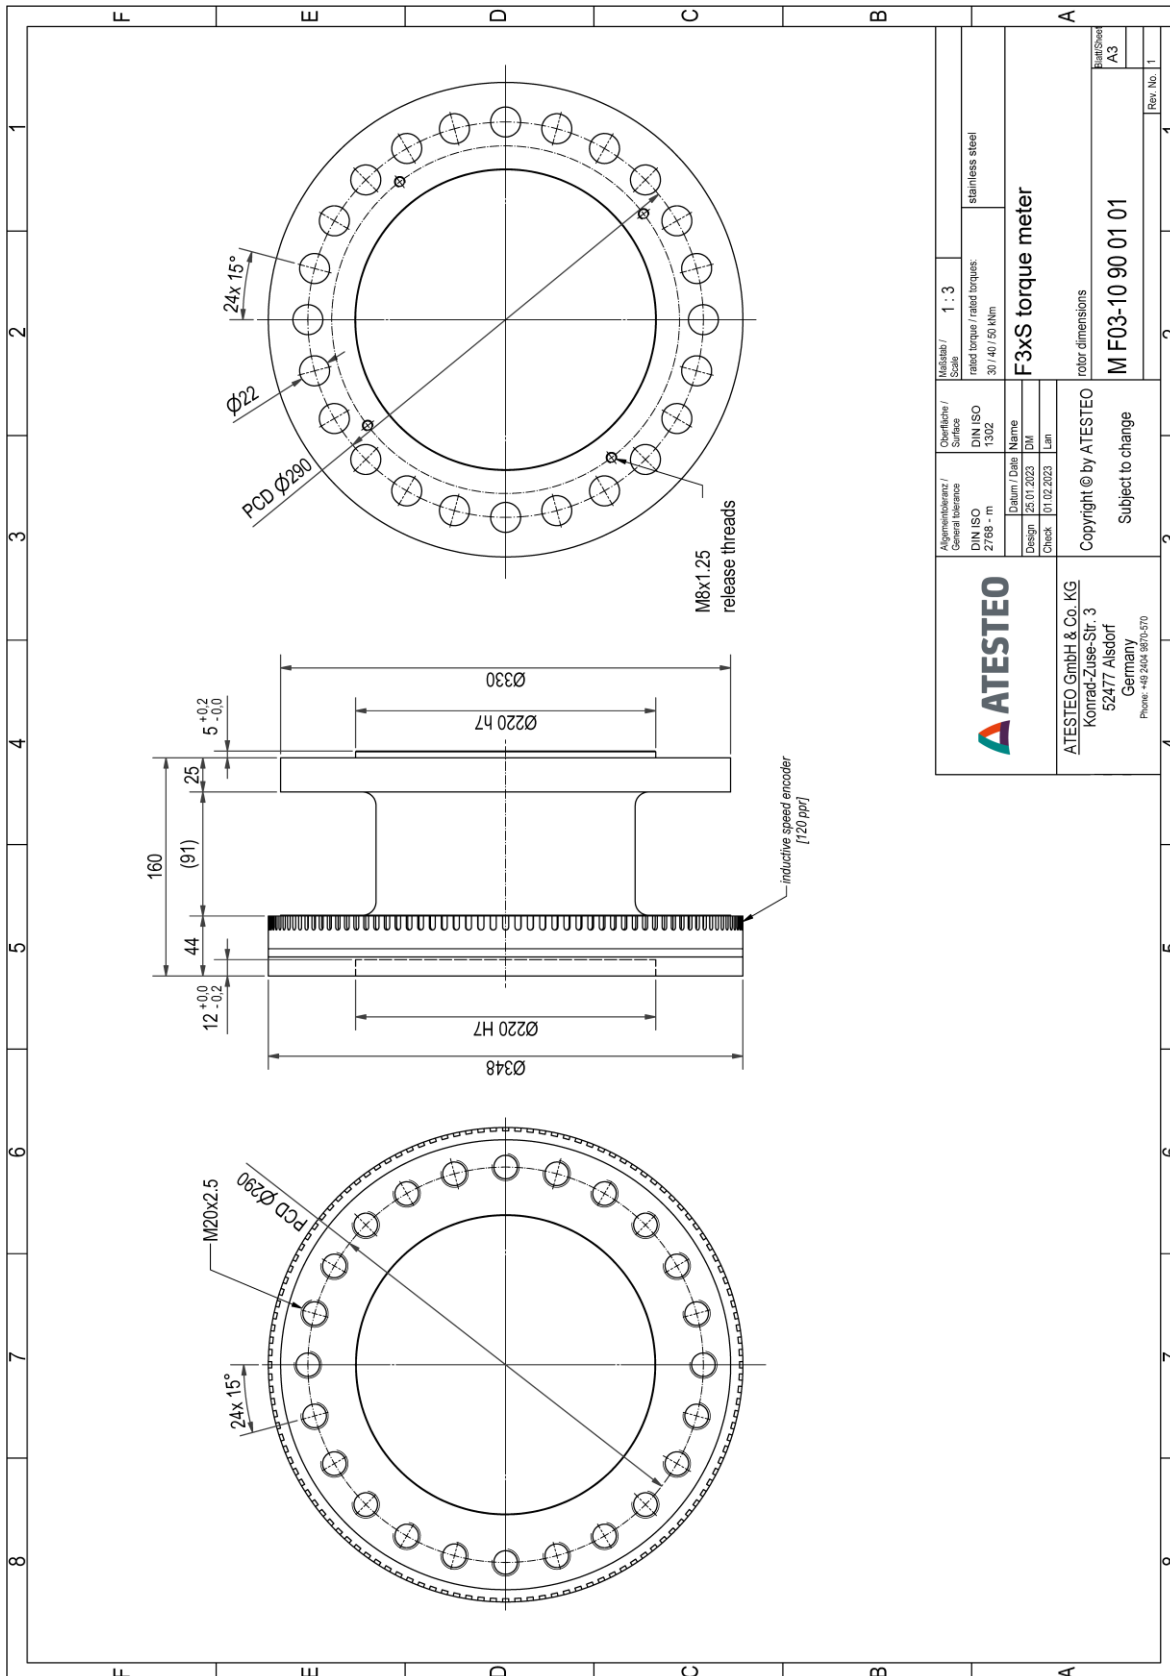

©2023, ATESTEO GmbH & Co. KG, This product data sheet was created on 03.27.2023.

The information contained in the product data sheet corresponds to the status quo at the time the document was created. ATESTEO continually further develops its products and reserves the right to make changes to the technical data. ATESTEO does not accept any liability for consequential losses arising from the use of this product data sheet or the information contained therein.

Drawing

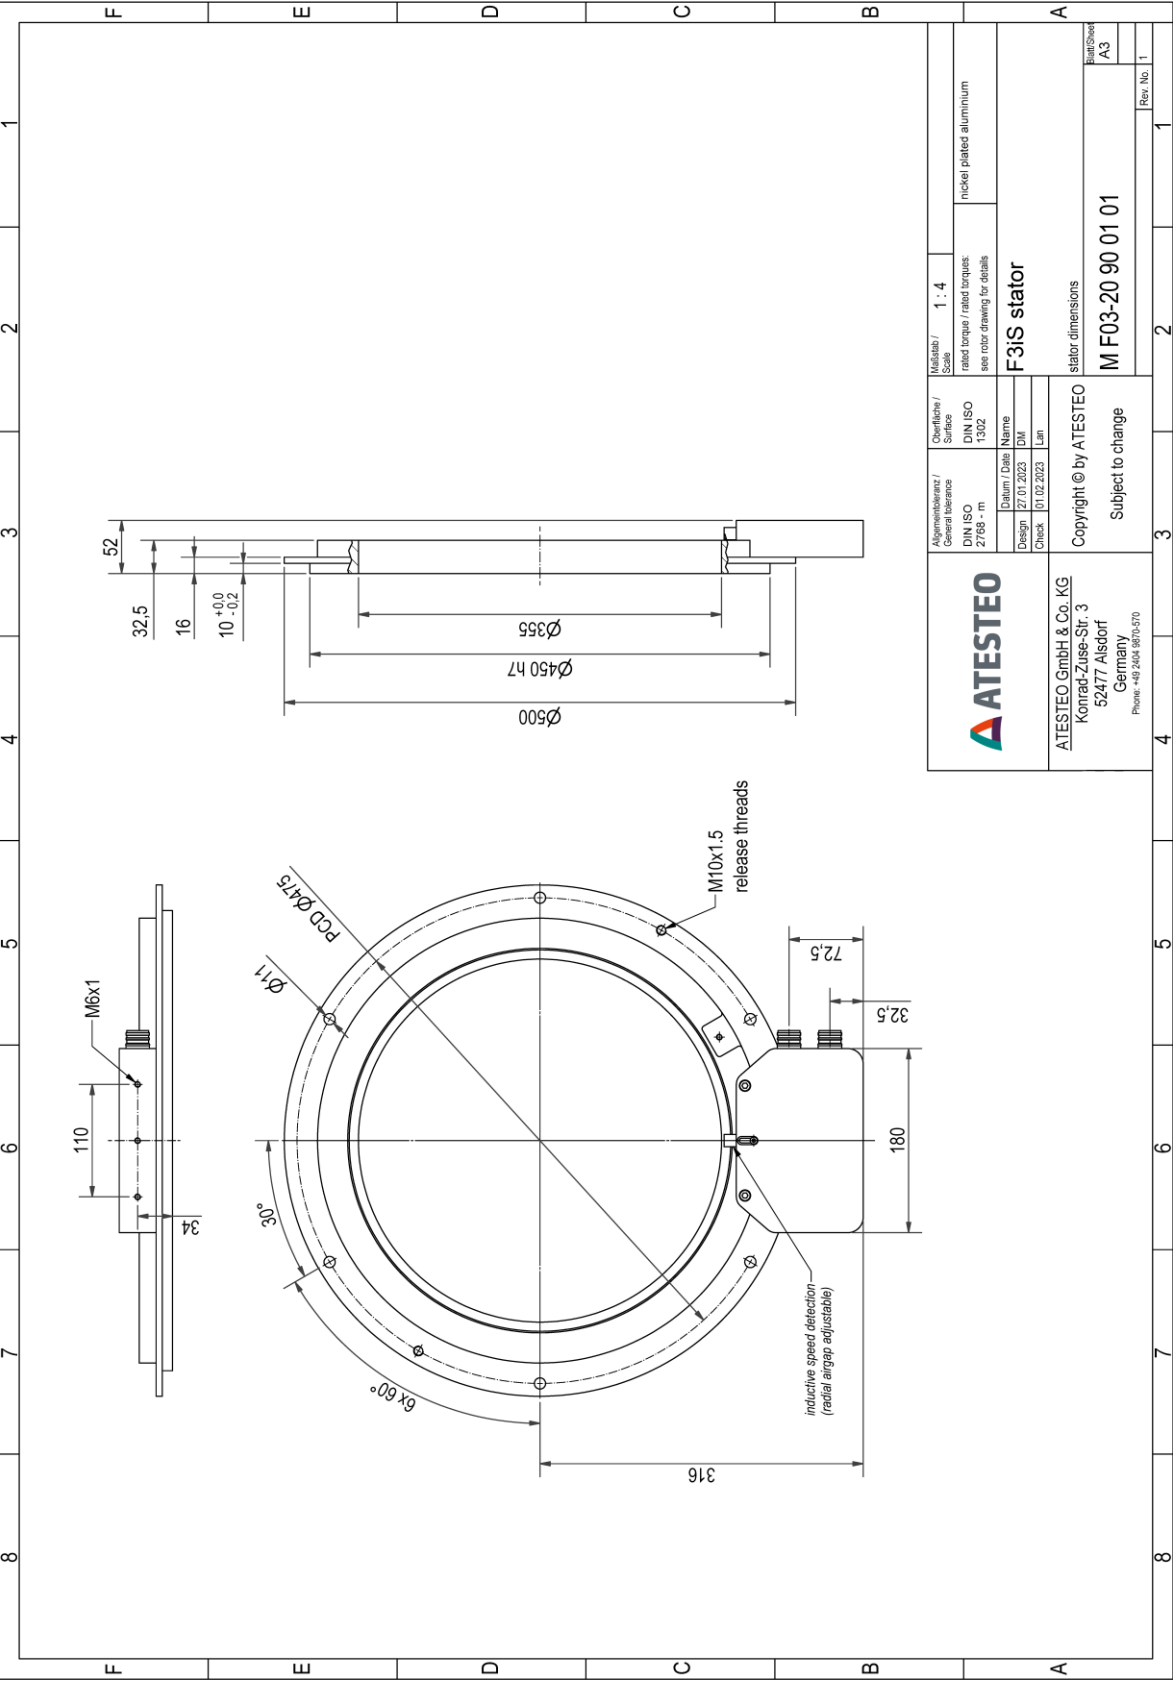


F3iS System

SPD_OPT

F3xS

Drawing

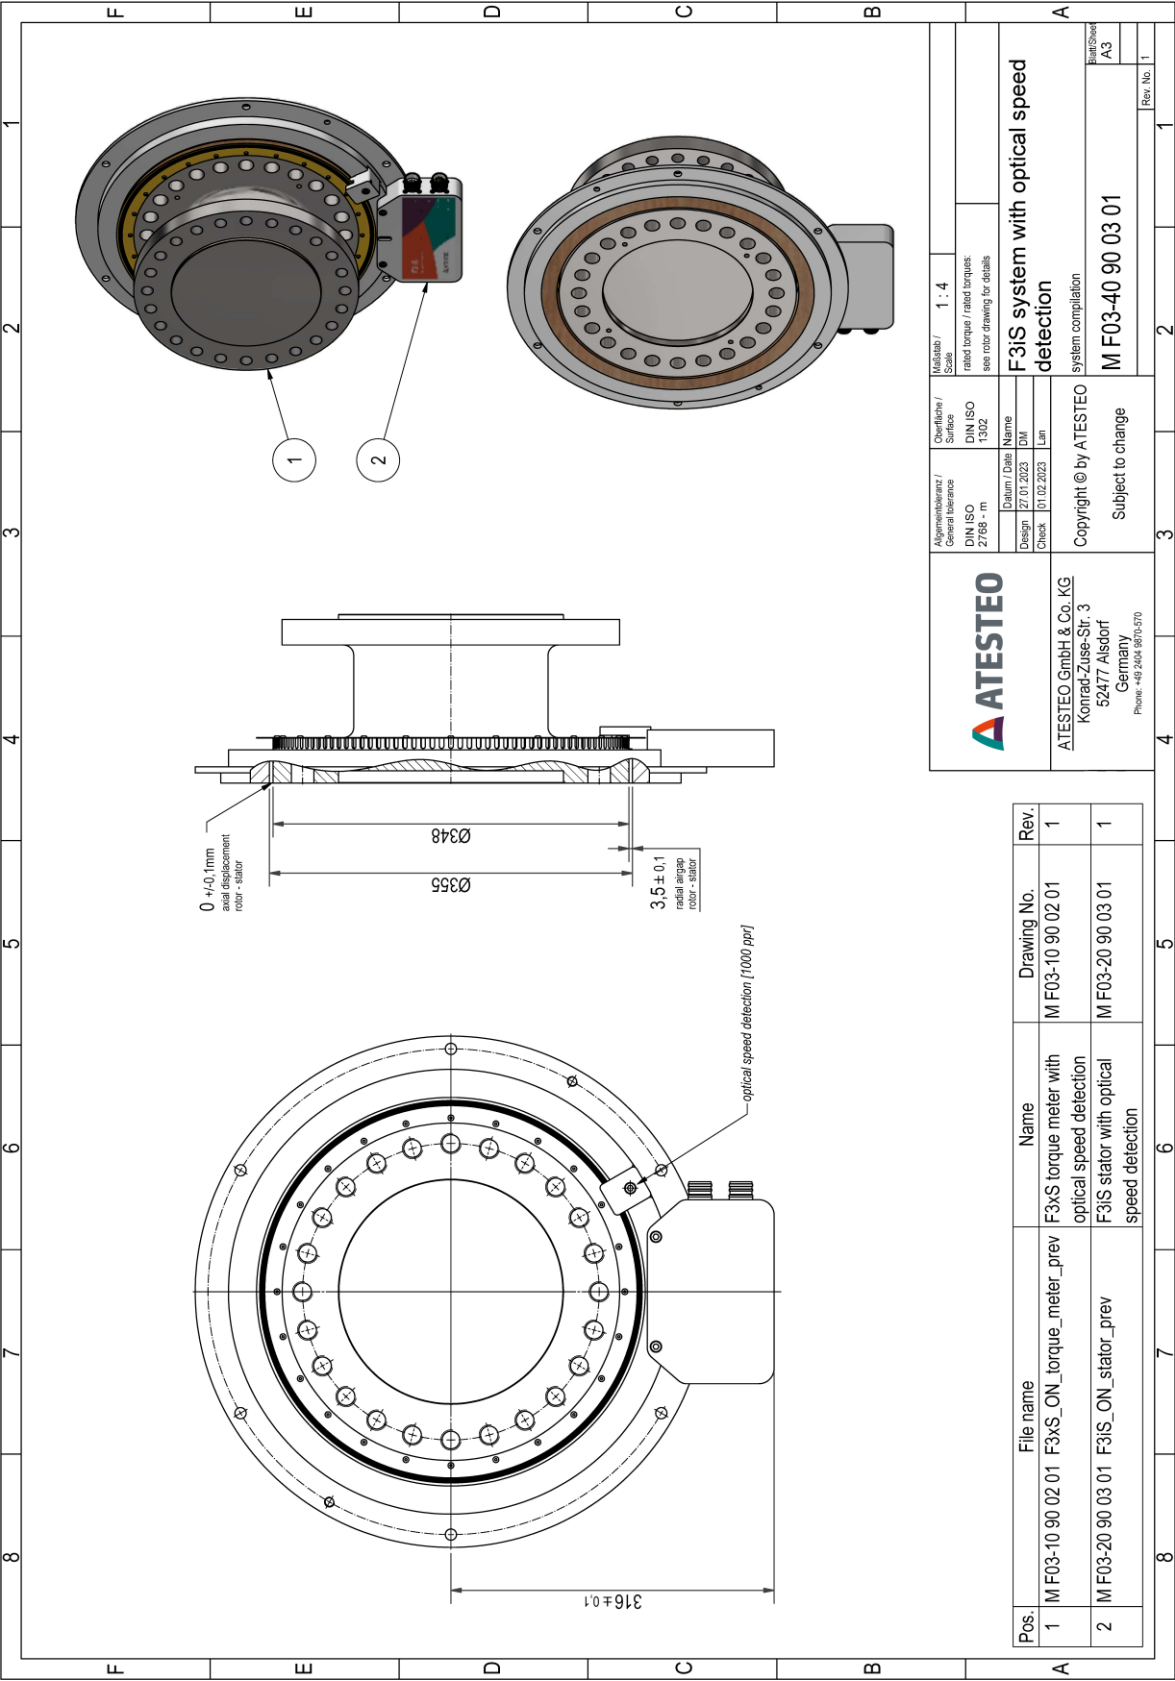

Drawing

F3xS





F3iS Stator

SPD_OPT

F3xS

Drawing

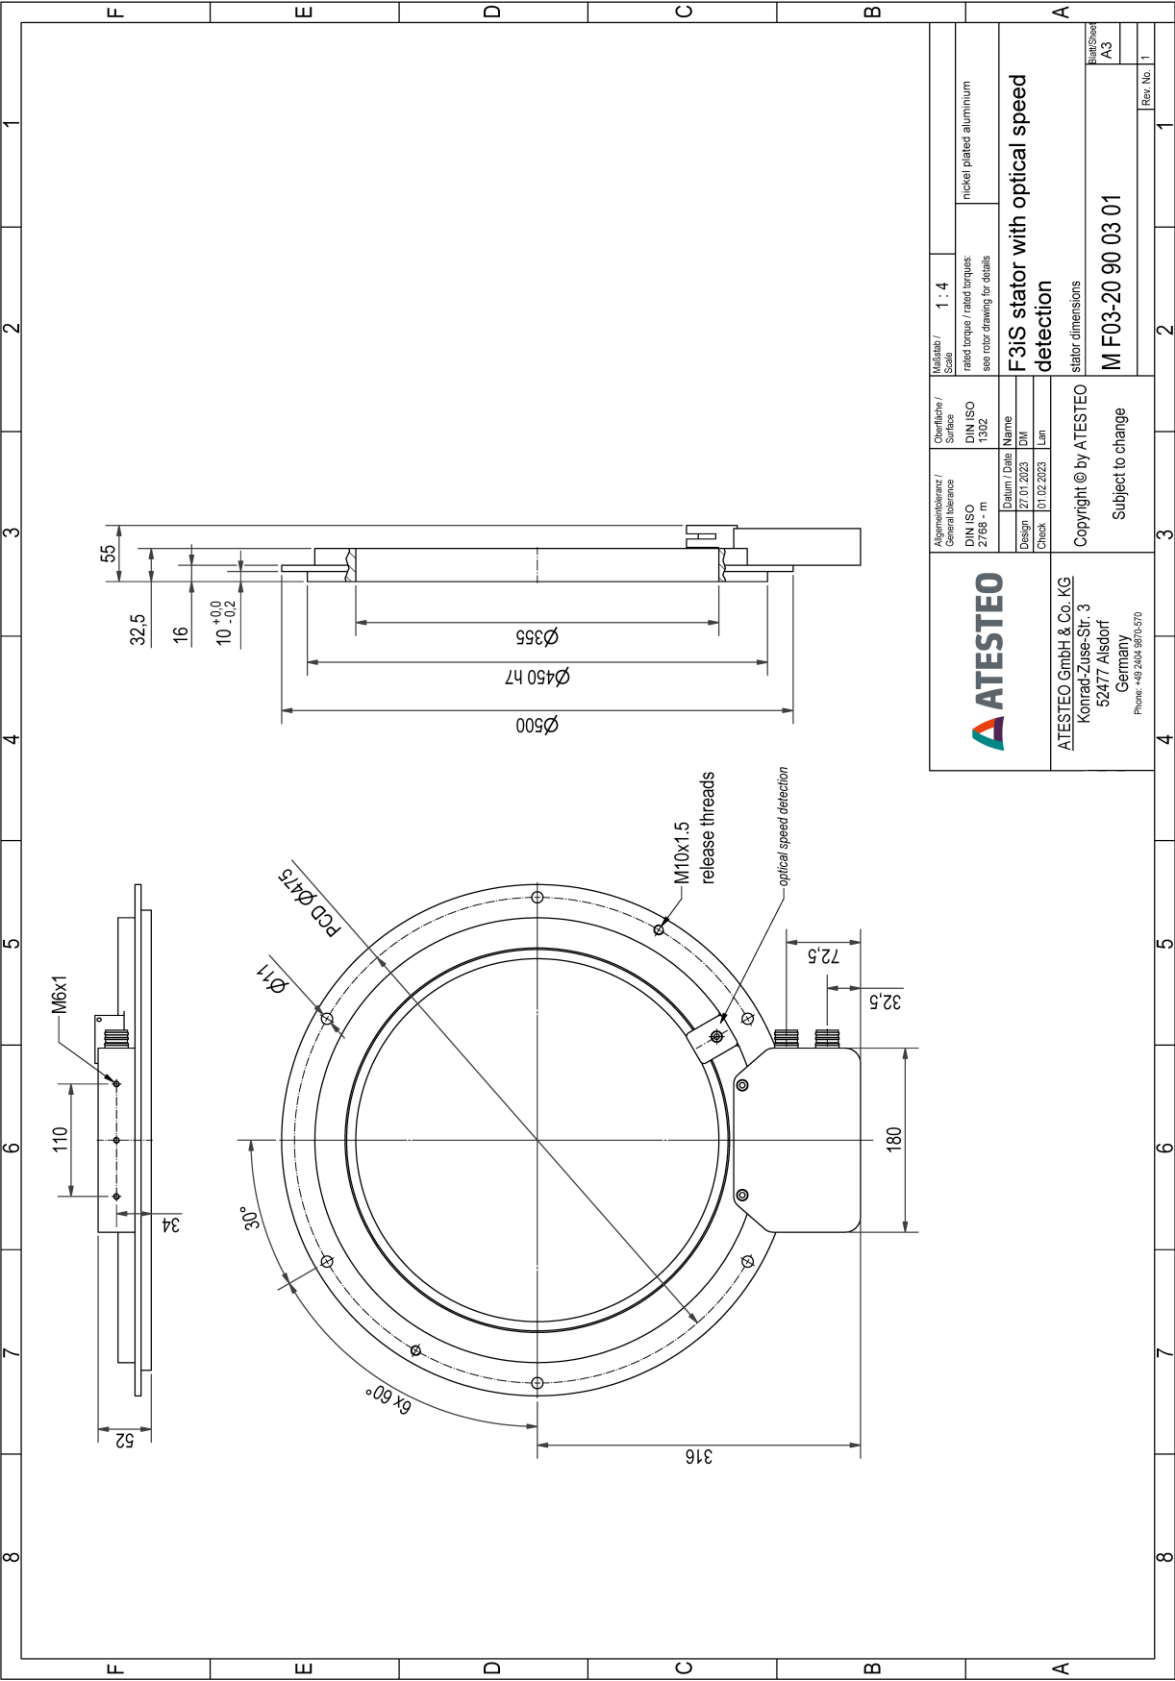


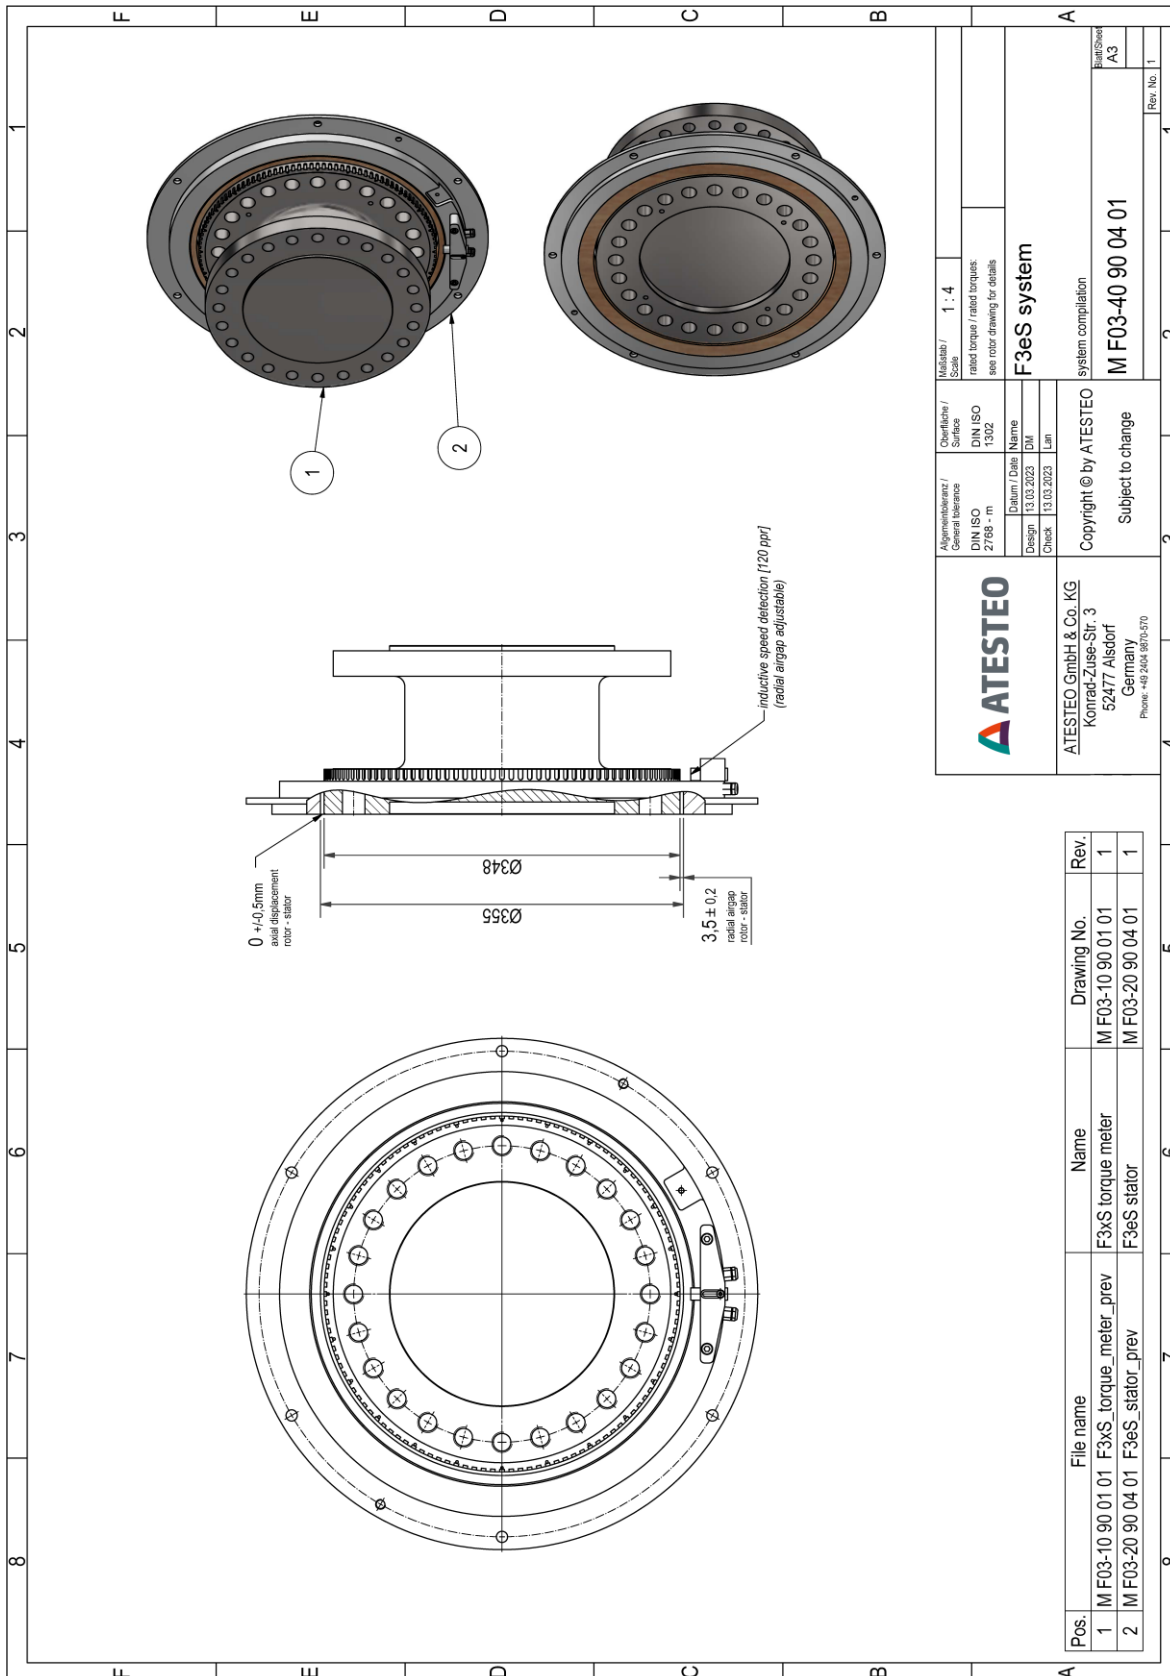

©2023, ATESTEO GmbH & Co. KG, This product data sheet was created on 03.27.2023.

The information contained in the product data sheet corresponds to the status quo at the time the document was created. ATESTEO continually further develops its products and reserves the right to make changes to the technical data. ATESTEO does not accept any liability for consequential losses arising from the use of this product data sheet or the information contained therein.


Drawing

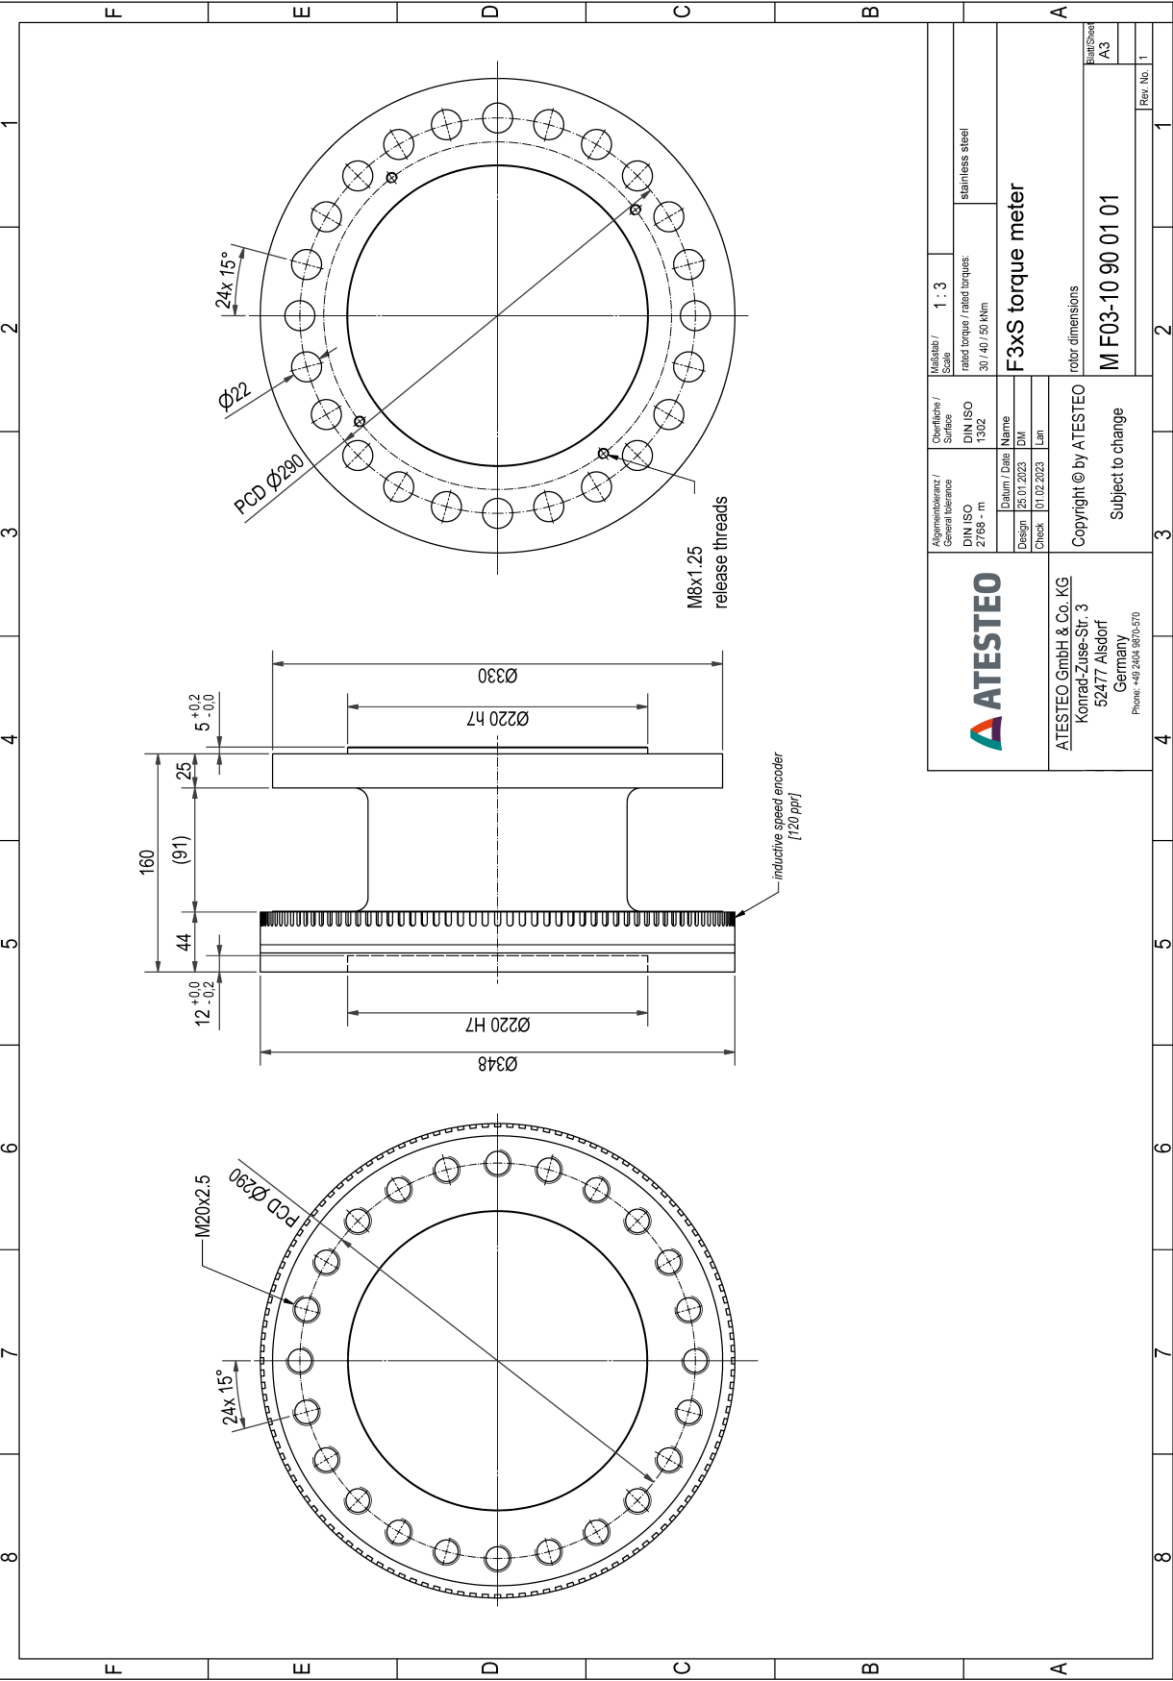

F3eS Stator

F3xS

Drawing

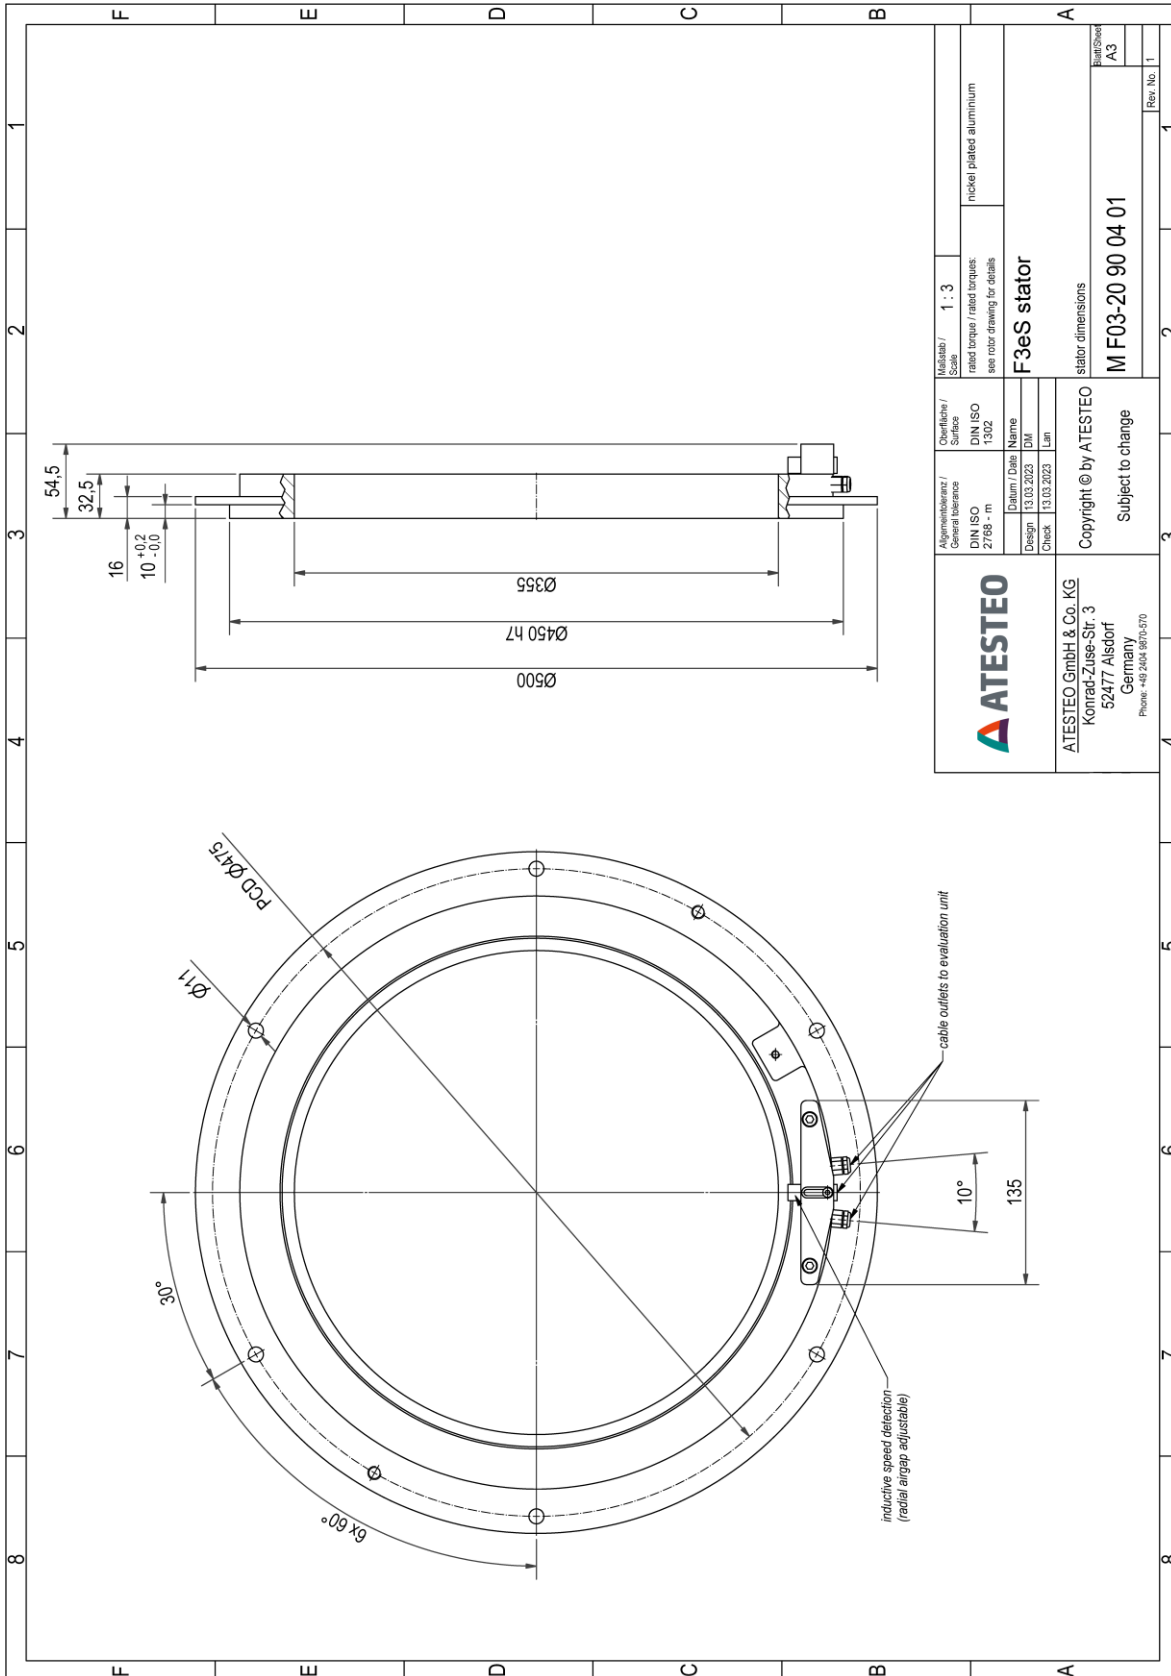

©2023, ATESTEO GmbH & Co. KG, This product data sheet was created on 03.27.2023.


The information contained in the product data sheet corresponds to the status quo at the time the document was created. ATESTEO continually further develops its products and reserves the right to make changes to the technical data. ATESTEO does not accept any liability for consequential losses arising from the use of this product data sheet or the information contained therein.

F3eS System

SPD_OPT

F3xS


Drawing

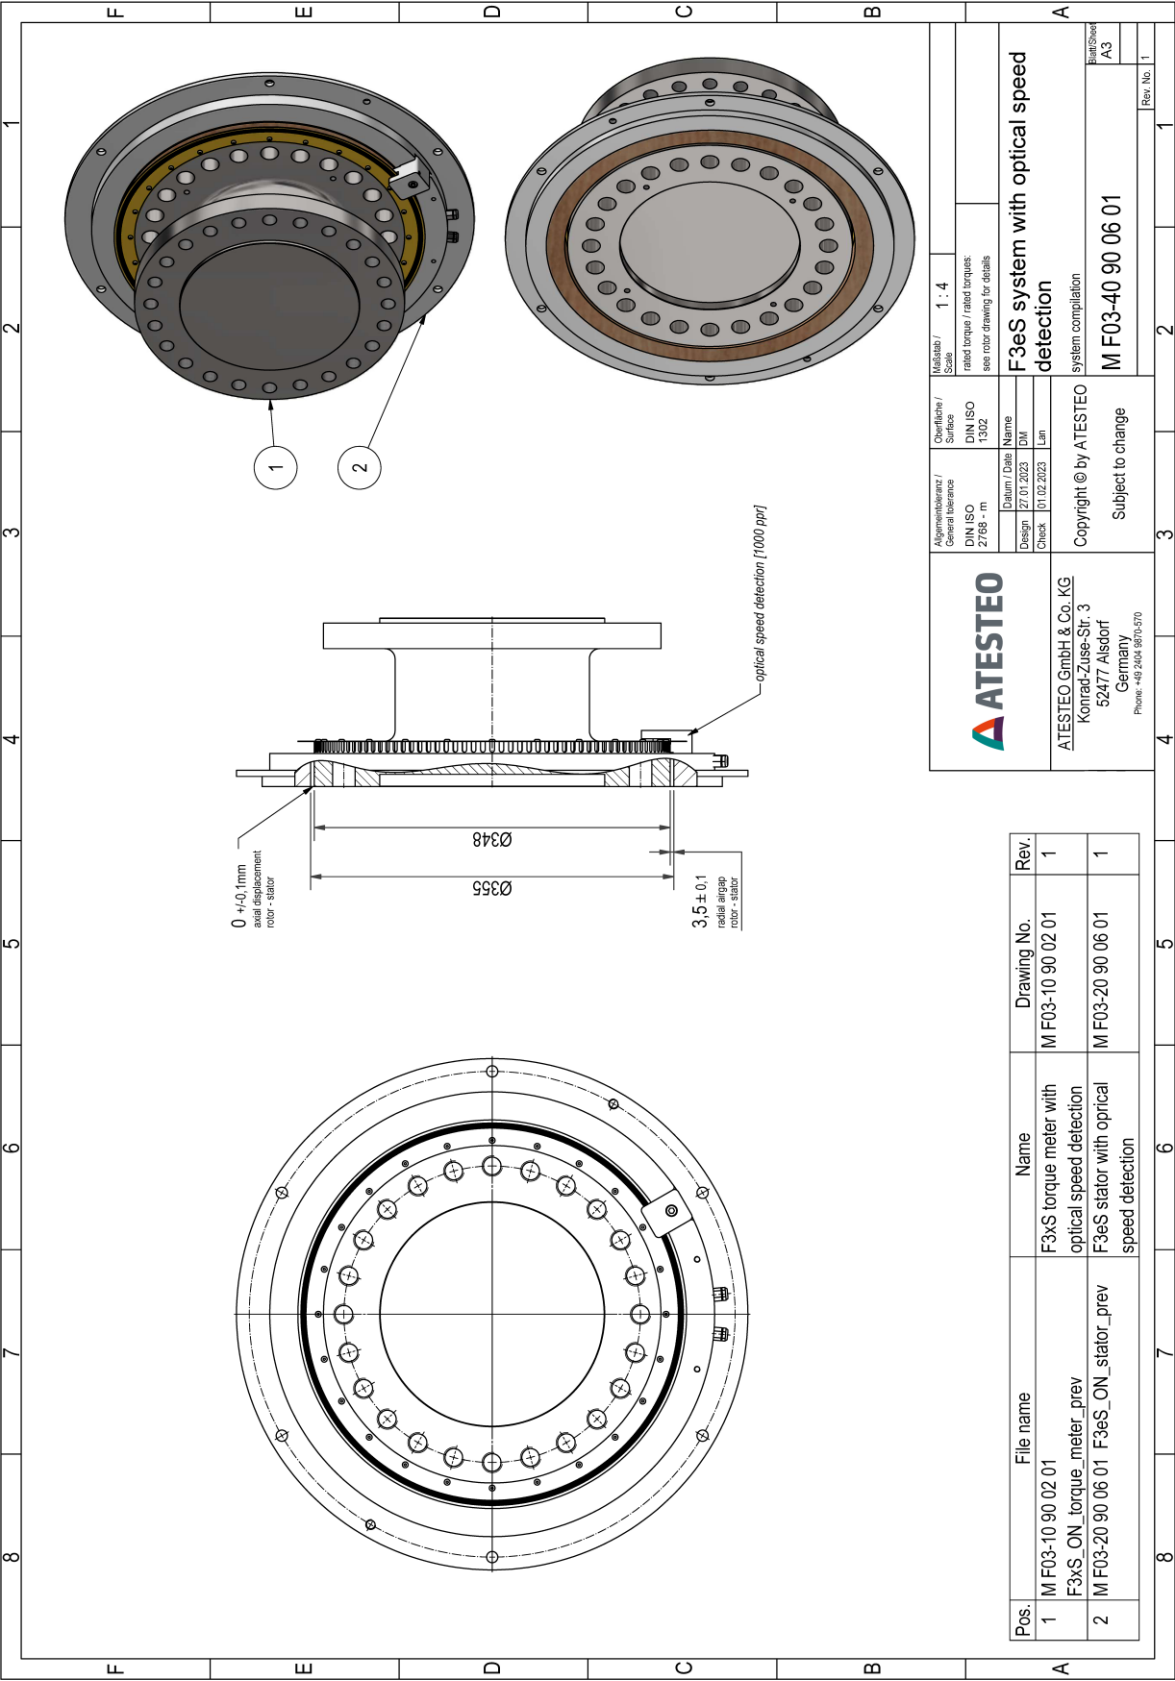

F3eS Rotor
SPD_OPT

F3xS


Drawing

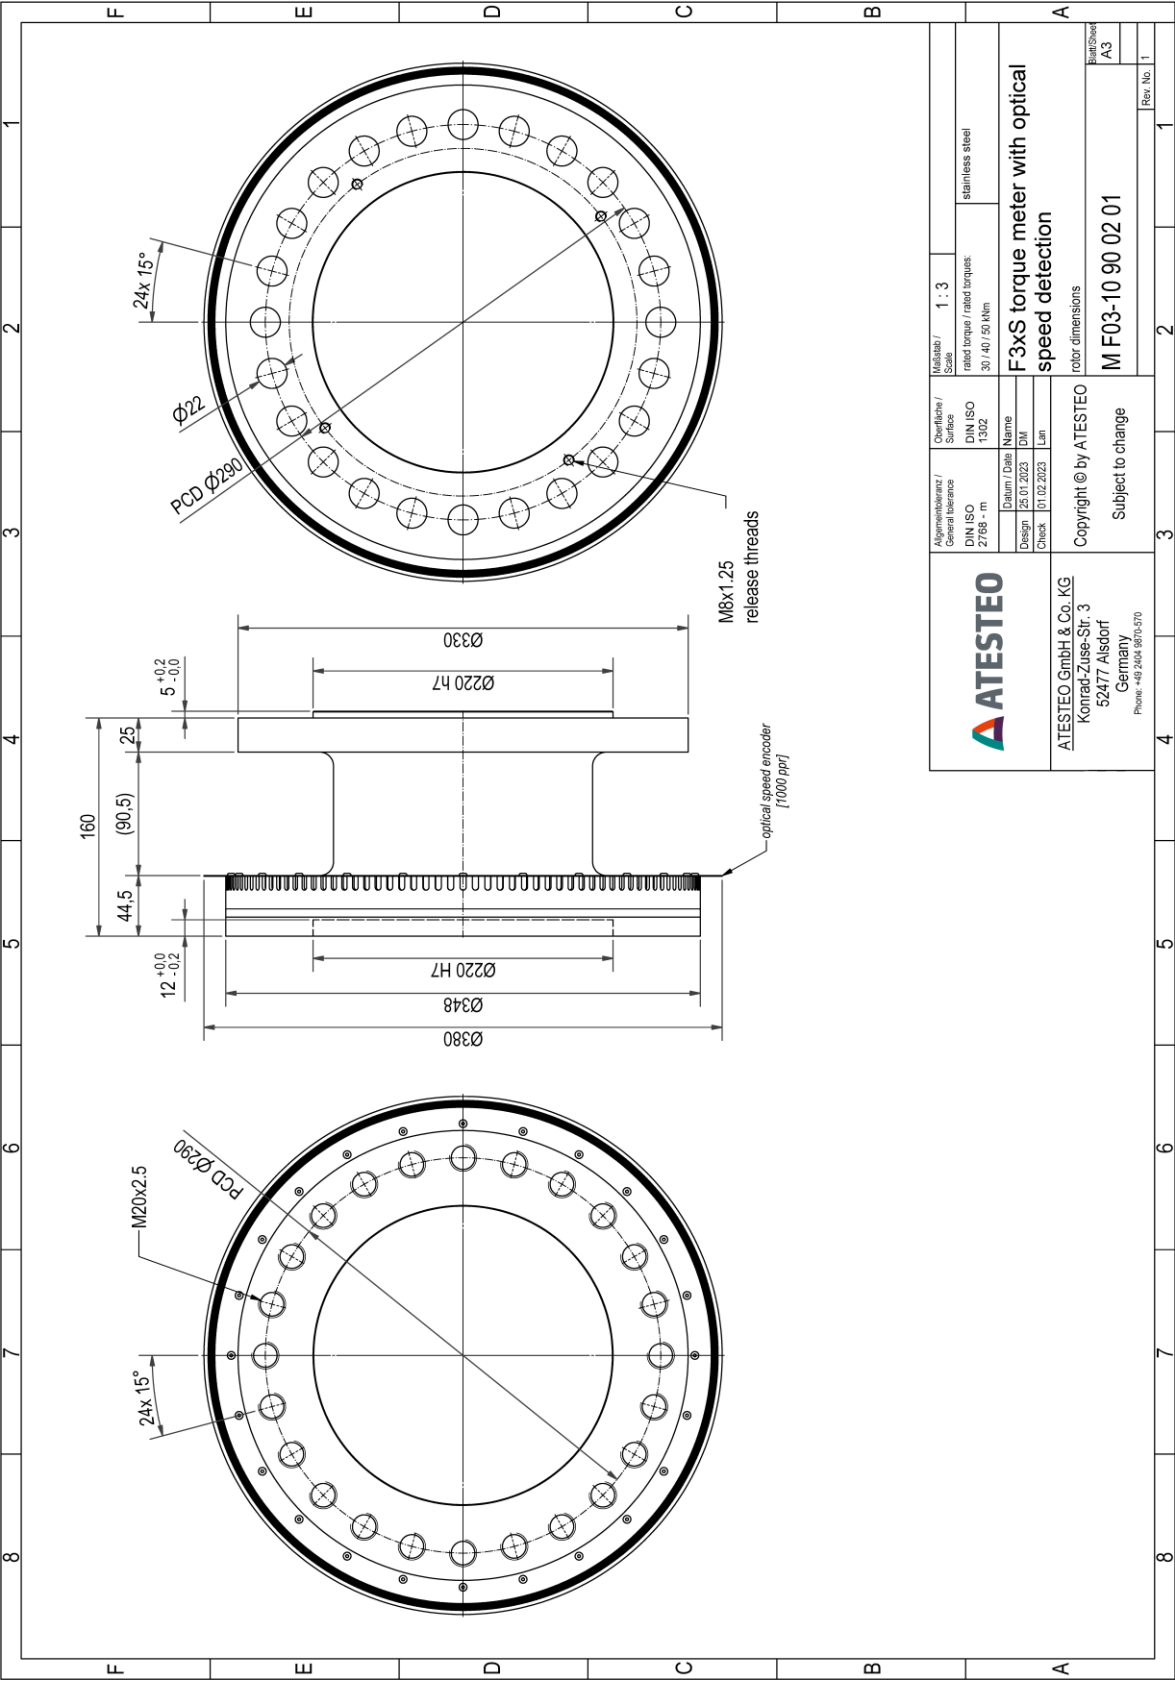


F3eS Stator
SPD_OPT

F3xS

Drawing

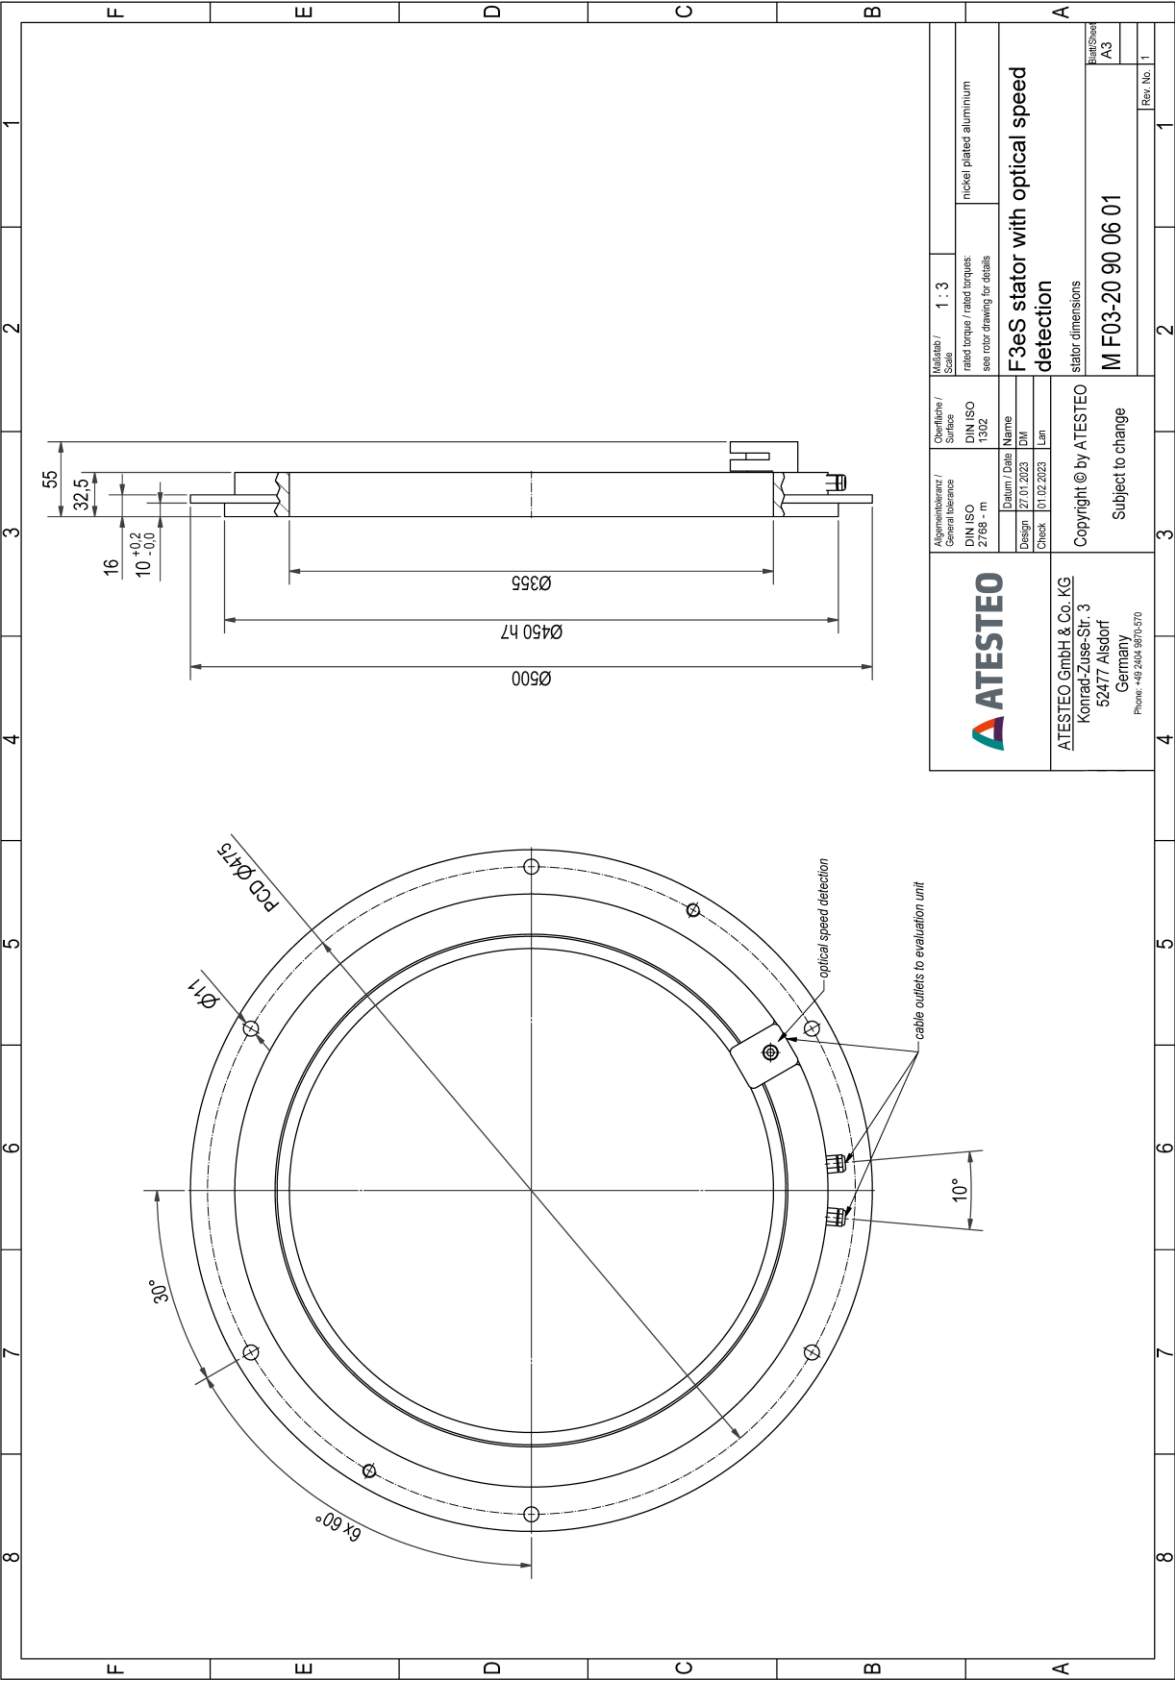

Drawing

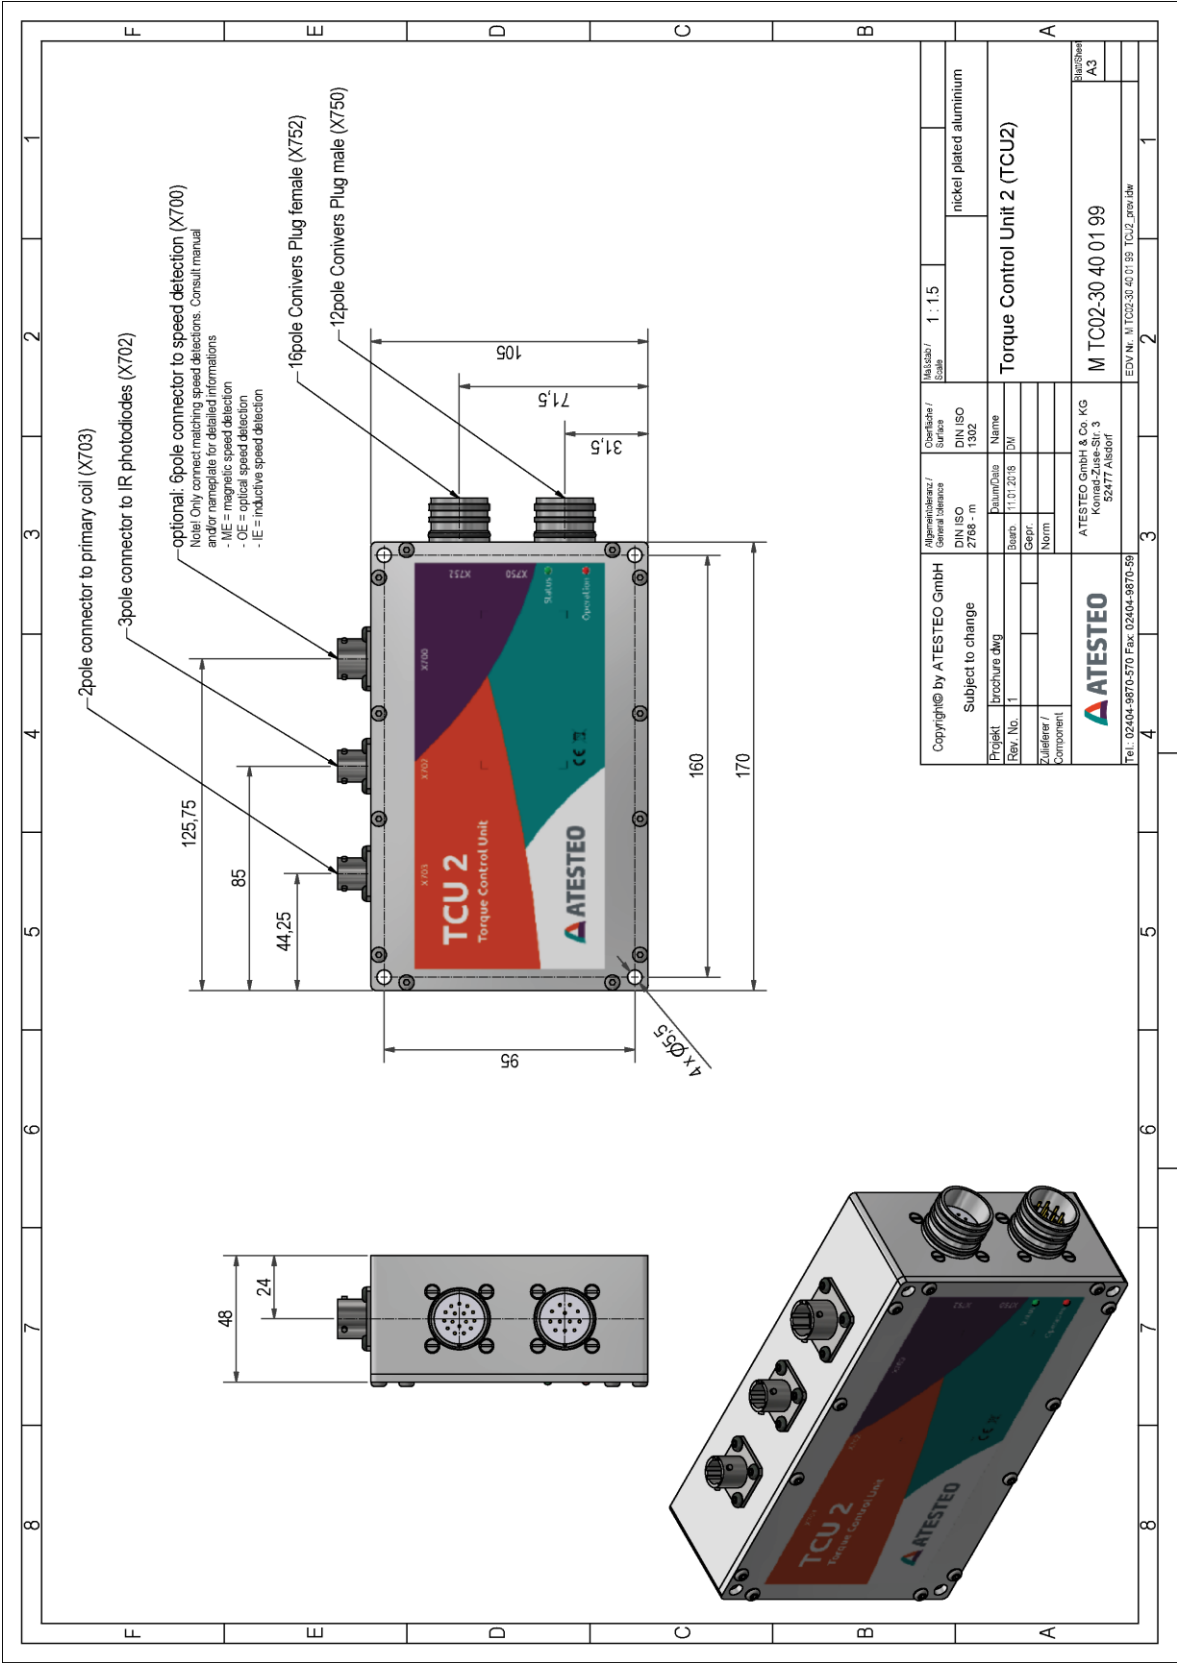

Would you like to learn more about our products, solutions, and services in the area of measuring systems, vehicle equipment, and actuators? Just call us at +49 (0) 2404 9870 570 or send email to zhang@yanatoo.com. Your personal ATESTEO contact would be pleased to assist you.



托驰（上海）工业传感器有限公司
上海市嘉定区华江路348号1号楼707室
Tel. 021-51069888 Fax. 021-51069009
www.yanatoo.ccom zhang@yanatoo.com

Phone +49 (0) 2404 9870 - 0
Email info@atesteo.com